


SG100T



Tiny and Simple PIR Sensor

Billion SG100T PIR sensor was a tiny and simple PIR sensor. It was easy to be installed. It can output a high / low signal to trigger the other device correctly and extremely. It also can setup 5 sec hold-time with Pet-Proof.

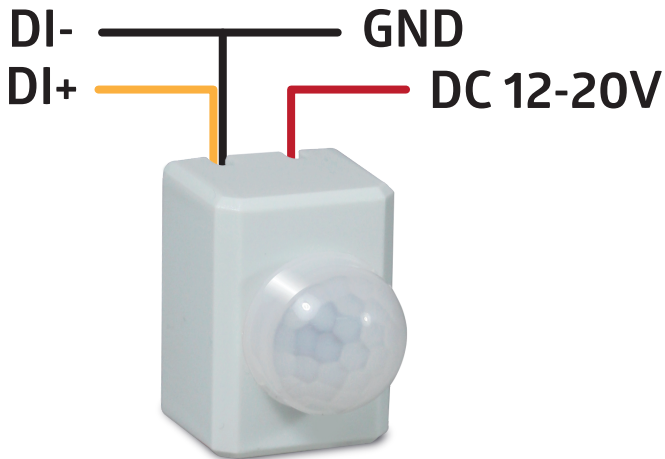

Features

- Simple and light weight design
- Ultra slim; easy to install
- Pet-proove design
- Whole body made in Taiwan
- 1 year warranty

Specifications

- Dimension 30mmx21mmx35mm
- Input: DC 12-20V
- Power consumption < 2mW
- Max. loading current: 1A
- Max. sensing angle 120°
- Max. sensing range 5m
- Hold-time 5 sec
- Interval between triggers 8-10 sec

